

WILDPEAK A/T3W

ALL-TERRAIN, ALL-WEATHER RUGGED CAPABILITY

The **WILDPEAK A/T3W** is engineered for adventure, any time and in any weather. The A/T3W combines aggressive off-road ability and rugged terrain driving without compromise on the pavement. An optimized tread design combined with a silica tread compound enable the A/T3W to excel in three areas: wear, winter, and wet performance. Designed for severe snow conditions, every A/T3W tire is qualified by USTMA and TRAC for the Three Peak Mountain Snow Flake (3PMSF) symbol.* The A/T3W is packed with technology, from Falken's patented 3D Canyon Sipes to an all-new proprietary lower sidewall. Full-depth sipes and grooves maintain consistent performance and appearance throughout the life of the tire.

*Not applicable to Wildpeak A/T3W products designated as original equipment tires for the Toyota Tundra TRD Pro.

AVAILABLE IN
83 SIZES

RIM SIZING
15"- 22"


SPEED RATING
Q / R / S / T



FREE replacement for up to two years or for the first 3/32nds of tread life.**

**Restrictions apply. Tire will be replaced free of charge. Mounting and balancing not included and you may be charged applicable taxes, the cost of valve stems, and disposal fees. Available in US and Canada only.

PERFORMANCE RATINGS[†]

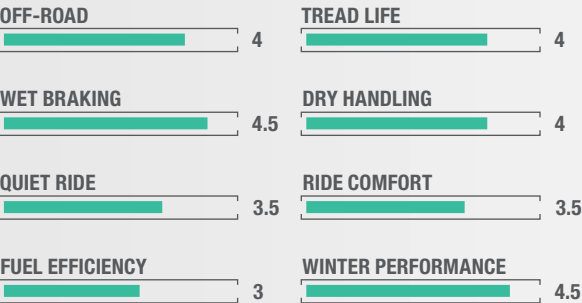

[†]Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR FITMENTS

CHEVROLET COLORADO	NISSAN TITAN
CHEVROLET SILVERADO	RAM TRUCKS
FORD F-SERIES	TOYOTA 4RUNNER
JEEP CHEROKEE	TOYOTA TACOMA
NISSAN FRONTIER	TOYOTA TUNDRA

This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

TIRE HIGHLIGHTS

- DEEPEST TREAD IN THE CATEGORY¹**
Class-leading tread depth provides long lasting wear as well as consistent snow and hydroplane resistance throughout the life of the tire.
¹LT Sizes, 19/32nds inches.
- DURABLE OFF-ROAD CAPABILITY**
Rugged and rigid tread blocks feature support ramps and step down features that provide tread-pattern rigidity in the contact patch, enhancing vehicle stability and handling while also preventing stones from becoming trapped in the grooves.
- POWERFUL HIGH TORQUE SUPPORT**
3D Canyon Sipe Technology interlocks the shoulders to resist wear from high torque as well as providing additional handling stability.
- RUGGED SIDEWALL PROTECTION**
Aggressive upper sidewall along with offset shoulder blocks protect the tire from sharp rocks and provide additional off-road traction at low tire pressures or in off-camber situations.

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



LT / SUV

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
15"	28034108	235/75R15	XL	-	109T	6.0 - 8.0	6.5	28.9	9.1	732	13	35.1	2271	50	660-A-B
	28037272	LT215/75R15	D	8	106/103R	5.5 - 7.0	6.0	27.7	8.5	764	16	36.2	2095 / 1930	65	-
	28037202	LT235/75R15	E	10	116/113R	6.0 - 7.0	6.5	28.7	9.2	739	16	40.8	2755 / 2535	80	-
	28030112	30x9.50R15LT	C	6	104S	6.5 - 8.5	7.5	29.5	9.5	708	17	44.1	1985	50	-
	28030114	31x10.50R15LT	C	6	109S	7.0 - 9.0	8.5	30.5	10.4	685	17	49.8	2270	50	-
	28037115	32x11.50R15LT	C	6	113R	8.0 - 10.0	9.0	31.5	11.3	664	18	56.2	2535	50	-
	28037116	33x12.50R15LT	C	6	108R	8.5 - 11.0	10.0	32.5	12.5	645	19	57.3	2205	35	-
	28037117	35x12.50R15LT	C	6	113R	8.5 - 11.0	10.0	34.5	12.5	608	19	69.7	2535	35	-
16"	28037745	225/75R16C	E	10	121/120R	6.0 - 7.0	6.0	29.3	8.7	711	16	41.7	3195 / 3085	83	-
	28037033	235/65R16C	E	10	121/119R	6.5 - 7.5	7.0	28.0	9.4	759	16	40.3	3195 / 3000	83	-
	28034109	235/70R16	XL	-	109T	6.0 - 8.0	7.0	29.0	9.4	729	13	36.8	2271	50	660-A-B
	28034608	P245/75R16	XL	-	112T	6.5 - 8.0	7.0	30.5	9.8	694	13	38.6	2469	50	660-A-B
	28034657	255/70R16	XL	-	115T	6.5 - 8.5	7.5	30.1	10.2	703	13	39.7	2679	50	660-A-B
	28034667	265/70R16	SL	-	112T	7.0 - 9.0	8.0	30.6	10.8	692	13	42.3	2469	51	660-A-B
	28034301	265/75R16	SL	-	116T	7.0 - 9.0	7.5	31.7	10.6	671	13	43.9	2756	51	660-A-B
	28037017	LT215/85R16	E	10	115/112R	5.5 - 7.0	6.0	30.4	8.5	696	16	42.1	2680 / 2470	80	-
	28030119	LT225/75R16	E	10	115/112S	6.0 - 7.0	6.0	29.3	8.5	711	16	41.4	2680 / 2470	80	-
	28030994	LT235/85R16	E	10	120/116S	6.0 - 7.5	6.5	31.7	9.1	658	17	47.8	3042 / 2778	80	-
	28030628	LT245/75R16	E	10	120/116S	6.5 - 8.0	7.0	30.5	9.5	684	17	49.4	3042 / 2778	80	-
	28030639	LT265/75R16	E	10	123/120S	7.0 - 8.0	7.5	31.7	10.4	660	17	52.5	3415 / 3085	80	-
	28037611	LT285/75R16	E	10	126/123R	7.5 - 9.0	8.0	32.8	11.1	637	18	60.6	3750 / 3415	80	-
	28037641	LT305/70R16	E	10	124/121R	8.0 - 9.5	9.0	32.8	12.1	637	18	63.3	3525 / 3195	65	-
	28037124	LT315/75R16	E	10	127/124R	8.0 - 11.0	8.5	34.6	12.3	606	19	72.1	3860 / 3525	65	-
17"	28034782	215/65R17	SL	-	99T	6.0 - 7.5	6.5	28.0	8.7	756	12	32.2	1709	51	660-B-B
	28034775	225/65R17	SL	-	102T	6.0 - 8.0	6.5	28.6	9.6	741	13	33.7	1874	51	660-B-B
	59000690	235/65R17	SL	-	104H	6.5 - 8.5	7.0	29.1	9.6	721	13	31.1	1984	50	600-B-A
	28034737	235/75R17	SL	-	109T	6.0 - 8.0	6.5	31.1	9.1	679	13	37.9	2271	51	660-A-B
	28034768	245/65R17	XL	-	111T	7.0 - 8.5	7.0	29.5	9.7	719	13	39.0	2403	50	660-A-B
	28034747	245/70R17	XL	-	114T	6.5 - 8.0	7.0	30.6	9.8	691	13	39.9	2601	50	660-A-B
	28034764	245/75R17	SL	-	112T	6.5 - 8.0	7.0	31.5	9.8	671	13	41.4	2469	51	660-A-B
	28034713	255/65R17	XL	-	114T	7.0 - 9.0	7.5	30.1	10.3	708	13	41.0	2601	50	660-A-B
	28034769	255/70R17	SL	-	112T	6.5 - 8.5	7.5	31.1	10.2	679	13	42.3	2469	51	660-A-B
	28034721	265/65R17	XL	-	116T	7.5 - 9.5	8.0	30.6	10.6	697	13	42.3	2756	50	660-A-B
	28034300	265/70R17	SL	-	115T	7.0 - 9.0	8.0	31.7	10.8	668	13	46.5	2679	51	660-A-B
	28034306	P285/70R17	SL	-	117T	7.5 - 9.5	8.5	32.8	11.3	647	13	50.5	2833	51	660-A-B
	28037616	LT235/80R17	E	10	120/117R	6.0 - 7.5	6.5	31.8	9.1	655	17	48.5	3085 / 2835	80	-
	28030718	LT245/70R17	E	10	119/116S	6.5 - 8.0	7.0	30.8	9.8	676	17	48.3	3000 / 2755	80	-
	28030711	LT245/75R17	E	10	121/118S	6.5 - 7.5	7.0	31.7	9.5	657	17	51.4	3195 / 2910	80	-
	28030332	LT255/80R17	E	10	121/118S	6.5 - 8.5	7.0	33.1	10.0	632	17	52.5	3195 / 2910	80	-
	28030712	LT265/70R17	E	10	121/118S	7.0 - 8.5	8.0	31.9	10.7	653	17	52.9	3195 / 2910	80	-
	28030907	LT275/70R17	C	6	114/110S	7.0 - 8.5	8.0	32.4	11.1	644	18	57.1	2600 / 2335	50	-
	59000350	LT285/70R17	C	6	116/113Q	7.5 - 9.0	8.5	32.8	11.1	634	18	63.7	2755 / 2535	50	-
	28030612	LT285/70R17	E	10	121/118S	7.5 - 9.0	8.5	33.0	11.6	632	18	58.9	3195 / 2910	80	-
	28030129	LT285/75R17	E	10	121/118S	7.5 - 9.5	8.0	33.9	11.1	617	18	65.5	3195 / 2910	80	-
	28030131	LT285/75R17	E	10	128/125S	7.5 - 9.5	8.0	33.9	11.1	617	18	65.5	3970	80	-
	28030777	LT315/70R17	C	6	113/110S	8.0 - 11.0	10.0	34.7	12.7	604	19	69.2	2535	65	-
	28030123	LT315/70R17	E	10	121/118S	8.0 - 11.0	10.0	34.6	12.7	604	19	72.8	3195 / 2910	65	-
	28037113	35x12.50R17LT	E	10	121R	8.5 - 11.0	9.5	34.8	12.5	602	19	71.0	3195	65	-
	28037921	37x12.50R17LT	D	8	124R	8.5 - 11.0	10.0	36.5	12.8	574	19	74.0	3525	50	-
	28037920	37x12.50R17LT	E	10	128R	8.5-11.0	10.0	36.5	12.8	580	19	74.7	3970	65	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. // No UTQG rating for LT sizes

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28034841	255/70R18	SL	-	113T	6.5 - 8.5	7.5	32.1	10.2	658	13	42.8	2535	51	660-A-B
	28034854	265/60R18	XL	-	114T	7.5 - 9.5	8.0	30.6	10.5	694	13	43.2	2601	50	660-A-B
	28034823	265/65R18	SL	-	114T	7.5 - 9.5	8.0	31.5	10.6	675	13	46.1	2601	51	660-A-B
	28034809	265/70R18	SL	-	116T	7.0 - 9.0	8.0	32.6	10.8	646	13	46.7	2756	51	660-A-B
	28034901	275/65R18	SL	-	116T	7.5 - 9.5	8.0	32.1	10.9	663	13	47.4	2756	51	660-A-B
	28034888	LT325/65R18	D	8	121/118T	9.0 - 12.0	9.5	34.6	13.0	605	19	75.4	3195	65	-
	28037324	LT265/65R18	E	10	122/119R	7.5 - 9.5	8.0	31.5	10.7	663	17	52.2	3305 / 3000	80	-
	28030127	LT265/70R18	E	10	124/121S	7.0 - 9.0	8.0	32.9	10.7	634	17	59.5	3525 / 3195	80	-
	28030803	LT275/65R18	E	10	123/120S	7.5 - 9.0	8.0	32.1	10.7	651	18	60.2	3415 / 3085	80	-
	28030703	LT275/70R18	E	10	125/122S	7.0 - 9.0	8.0	33.4	11.0	624	18	60.8	3640 / 3305	80	-
	28030827	LT285/65R18	E	10	125/122S	8.0 - 10.0	8.5	32.6	11.3	642	18	59.5	3640 / 3305	80	-
	28037333	LT285/75R18	E	10	129/126R	7.5 - 9.5	8.0	34.8	11.3	599	18	65.9	4080 / 3750	80	-
	28037327	LT295/70R18	E	10	129/126R	7.5 - 10.0	8.5	34.3	11.9	609	18	68.1	4080 / 3750	80	-
	28037335	LT305/65R18	F	12	128/125R	8.5 - 11.0	9.0	33.6	12.2	623	18	70.5	3970 / 3640	80	-
	28030126	LT325/65R18	E	10	127/124S	9.0 - 12.0	9.5	34.6	13.0	605	19	76.7	3860 / 3525	65	-
	28037334	35x12.50R18LT	F	12	128R	8.5 - 11.0	10.0	34.6	12.2	612	19	74	3970	80	-
28037330	37x12.50R18LT	E	10	128R	8.5 - 11.0	10.0	36.6	12.9	571	19	79.4	3970	65	-	
20"	28034021	275/55R20	XL	-	117T	7.5 - 9.5	8.5	31.9	11.1	661	13	48.1	2833	50	660-A-B
	28034003	275/60R20	SL	-	115T	7.5 - 9.5	8.0	33.1	10.8	640	13	47.8	2679	51	660-A-B
	28030128	LT265/60R20	E	10	121/118S	7.5 - 9.5	8.0	32.5	10.2	640	17	58.2	3195 / 2910	80	-
	28030008	LT275/55R20	D	8	115/112S	7.5 - 9.5	8.5	31.9	10.9	662	18	56.4	2680 / 2470	65	-
	28030009	LT275/60R20	D	8	119/116S	7.5 - 9.5	8.0	33.0	11.0	641	18	58.2	3000 / 2755	65	-
	28030120	LT275/65R20	E	10	126/123S	7.5 - 9.5	8.0	34.1	10.6	611	18	66.1	3750 / 3415	80	-
	28034121	LT285/55R20	E	10	122/119T	8.0 - 10.0	9.0	32.4	11.2	642	18	58.2	3305 / 3000	80	-
	28037329	LT285/60R20	E	10	125/122R	8.0 - 10.0	8.5	33.5	11.4	622	18	65.5	3640 / 3305	80	-
	28037326	LT285/65R20	E	10	127/124R	8.0 - 10.0	8.5	34.6	11.4	603	18	67.7	3860 / 3525	80	-
	28037328	LT295/60R20	E	10	126/123R	8.0 - 10.0	8.5	33.9	11.7	614	18	65.3	3750 / 3415	80	-
	28030385	LT305/55R20	F	12	125/122S	8.5 - 11.0	9.5	33.2	12.5	626	18	66.1	3640 / 3305	80	-
	28030125	LT325/60R20	E	10	126/123S	9.0 - 12.0	9.5	35.4	12.8	591	19	76.7	3750 / 3415	65	-
	28030310	35X11.50R20LT	D	8	120S	8.0 - 10.5	9.0	34.5	11.4	607	18	65.5	3085	65	-
	28037307	35x12.50R20LT	F	12	125R	8.5 - 11.0	10.0	34.6	12.7	603	19	76	3640	80	-
	28037331	37x12.50R20LT	E	10	126R	8.5 - 11.0	10.0	36.5	13.0	570	19	77.8	3750	65	-
22"	28034219	285/45R22	XL	-	114T	9.0 - 10.5	9.5	32.1	11.1	648	12	48.1	2601	50	660-A-B