

WILDPEAK MIT

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN

- Trusted by the Pros to Take on The Hardest Conditions
- 3-Ply DURASPEC Sidewall with Two High Ply Turn-Ups
- Quiet Comfortable Ride on the Highway
- Advanced Off-Road Handling
- Additional Traction at Low Air Pressures on Rugged Terrain


AVAILABLE IN
28 SIZES

RIM SIZING
15"- 22"

SPEED RATING
Q



PERFORMANCE RATINGS

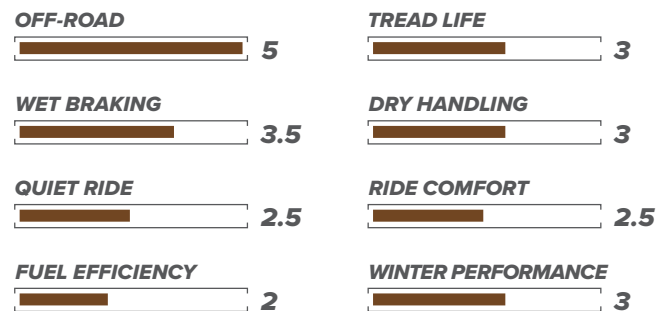

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

CHEVROLET SILVERADO	NISSAN XTERRA
FORD F-SERIES	RAM TRUCKS
JEEP CHEROKEE	TOYOTA FJ CRUISER
JEEP WRANGLER	TOYOTA TACOMA
NISSAN TITAN	TOYOTA TUNDRA

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



LT 1 SUV


TIRE HIGHLIGHTS



RUGGED AND RIGID TREAD BLOCKS
feature step down supports on the center blocks to provide tread-pattern rigidity in the contact patch, enhancing stability and handling while preventing stones from becoming trapped in the grooves.



MUD AND ROCK DEFENSE FEATURES
shed mud from the tread grooves to prevent loss of traction, ensuring maximum grip while preventing rocks from puncturing the base of the tread.




DURASPEC™ 3-PLY SIDEWALL
along with offset shoulder blocks protect the tire from sharp rocks and provide additional off-road traction at low tire pressures or in off-camber situations.



OPTIMIZED TREAD PATTERN
with three variable pitches, positions the tread blocks to provide an exceptionally quiet ride

WILDPEAK MIT

LEARN MORE



MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
15"	28516312	30x9.50R15LT	C	6	104Q	6.5 - 8.5	7.5	29.6	9.6	713	19	46.5	1985	50
	28516322	31x10.50R15LT	C	6	109Q	7.0 - 9.0	8.5	30.7	10.5	687	19	54.0	2270	50
	28516518	33x12.50R15LT	C	6	108Q	8.5 - 11.0	10.0	32.6	13.0	650	21	75.0	2205	35
	28516920	35x12.50R15LT	C	6	113Q	8.5 - 11.0	10.0	34.5	12.9	617	21	76.7	2535	35
16"	28516994	LT235/85R16	E	10	120/116Q	6.0 - 7.5	6.5	31.8	9.2	656	18	52.7	3042 / 2778	80
	28516628	LT245/75R16	E	10	120/116Q	6.5 - 8.0	7.0	30.4	9.9	686	18	55.3	3042 / 2778	80
	28516036	LT255/85R16	E	10	123/120Q	6.5 - 8.0	7.0	33.1	10.2	643	19	59.1	3415 / 3085	80
	28516639	LT265/75R16	E	10	123/120Q	7.0 - 8.0	7.5	32.0	10.6	653	19	60.0	3415 / 3085	80
	28516611	LT285/75R16	E	10	126/123Q	7.5 - 9.0	8.0	32.7	11.5	638	20	67.7	3750 / 3415	80
	28516934	LT315/75R16	E	10	127/124Q	8.0 - 11.0	8.5	34.7	12.6	603	21	77.8	3860 / 3525	65
17"	28516616	LT235/80R17	E	10	120/117Q	6.0 - 7.5	6.5	32.0	9.2	651	18	51.6	3085 / 2835	80
	28516714	LT255/75R17	C	6	111/108Q	6.5 - 8.5	7.0	32.3	10.2	646	18	53.1	2405 / 2205	50
	28516702	LT265/70R17	E	10	121/118Q	7.0 - 8.5	8.0	31.7	10.6	659	19	56.9	3195 / 2910	80
	59000360	LT285/70R17	C	6	116/113Q	7.5 - 9.0	8.5	32.8	11.0	634	18	61.3	2755 / 2535	50
	28516612	LT285/70R17	E	10	121/118Q	7.5 - 9.0	8.5	32.9	11.4	635	20	63.3	3195 / 2910	80
	28516936	LT295/70R17	E	10	121/118Q	7.5 - 10.0	8.5	33.4	11.7	625	20	69.0	3195 / 2910	80
	28516932	LT315/70R17	E	10	121/118Q	8.0 - 11.0	9.5	34.6	12.8	604	20	80.7	3195 / 2910	65
	28516710	33x12.50R17LT	E	10	120Q	8.5 - 11.0	10.0	32.7	12.5	643	21	68.8	3085	65
	28516995	35x12.50R17LT	E	10	121Q	8.5 - 11.0	10.0	34.8	13.0	609	21	79.6	3195	65
	28516921	37x12.50R17LT	D	8	124Q	8.5 - 11.0	10.0	36.7	12.9	577	21	81.8	3525	50
	28516734	38x13.50R17LT	D	8	128Q	9.0 - 11.5	11.0	37.8	13.6	562	21	92.6	3860	50

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
18"	28516703	LT275/70R18	E	10	125/122Q	7.0 - 9.0	8.0	33.4	10.9	624	20	66.1	3640 / 3305	80
	28516827	LT285/65R18	E	10	125/122Q	8.0 - 10.0	8.5	32.8	11.6	637	19	64.6	3640 / 3305	80
	28516999	35x12.50R18LT	E	10	123Q	8.5 - 11.0	10.0	34.7	13.0	607	21	78.7	3415	65
20"	28516952	LT305/55R20	E	10	121/118Q	8.5 - 11.0	9.5	33.3	12.3	625	19	70.1	3195 / 2910	65
	28516906	33x12.50R20LT	E	10	114Q	8.5 - 11.0	10.0	32.8	12.7	638	21	70.3	2600	65
	28516905	35x12.50R20LT	E	10	121Q	8.5 - 11.0	10.0	34.7	12.6	604	21	72.5	3195	65
	28516951	37x13.50R20LT	E	10	127Q	8.5 - 11.0	11.0	36.7	13.6	573	21	87.3	3860	65

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.

