

Michelin

Defender LTX M/S 2

Michelin Defender LTX M/S 2 is completely redesigned to meet the needs of today's vehicles. With modern pickup trucks and full-size SUVs getting larger and more powerful, Defender LTX M/S 2 offers the increased tread-life that today's drivers expect.



ALL-SEASON



Best in class mileage delivering two extra years of tread-life.

The Michelin Defender LTX M/S 2 tire can provide 2 years of additional tread-life compared to three leading competitive tires.¹

Uncompromised comfort and quiet drive.


Michelin uses PIANO[®] Acoustic Tuning to smooth out the disturbances from each tread block, reducing noise energy peaks to ensure a quiet and comfortable drive.

Reliable Traction in demanding conditions.

The Michelin Defender LTX M/S 2 tire combines the Michelin EverTread 2.0 compound with full-depth SipeLock sipes for reliable traction in demanding conditions throughout the life of the tire.

Michelin Promise Plan.

Supported by the Michelin Promise Plan of a 60-day satisfaction guarantee, roadside assistance, and up to 70,000 mileage warranty. Click here for details.

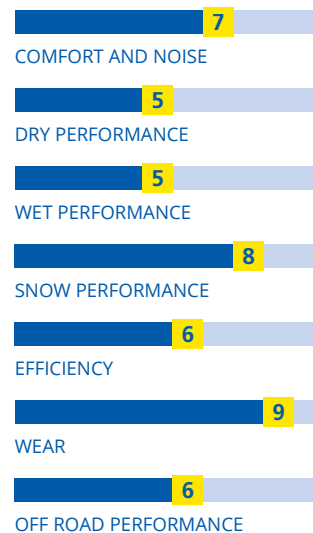

Popular Replacement Market Fitments:

Ford F-Series
Chevrolet Silverado
Chevy Tahoe
Ram Trucks
Toyota Tacoma
Toyota Tundra

¹Based on U.S. Department of Transportation Average Annual Miles per driver (13,500 miles) and DesRosiers Automotive Consultants estimate of annual average kilometers driven in Canada (23,000 km), and on a tread-wear test using tires in size 275/55R20 on 2020 Ford F-150 where the Michelin Defender LTX M/S 2 tire showed an estimated life (based on calculating the most-worn groove of a rotated set) of 95,200 miles versus the Bridgestone Alenza AS Ultra at 45,300 miles and the Continental TerrainContact H/T at 65,900 miles and the Pirelli Scorpion All Season Plus 3 at 61,100 miles. Actual on-road results may vary.



Michelin **Defender LTX M/S 2**

Tire Size	Service Description	Technology	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
255/70R16/XL	115T	RFID	M + S	70K	ORWL	10581	6.5 - 8.5	10.2 on 7.5	30.1	12.5	691	2679@50	820/B/A	
265/70R16/XL	116T	RFID	M + S	70K	ORWL	93928	45542	10.7 on 8	30.6	12.5	679	2756@50	820/B/A	
245/70R17/XL	114T	RFID	M + S	70K	BSW	546	6.5 - 8	9.8 on 7	30.1	12.5	681	2601@50	820/B/A	
245/75R17/XL	116T	RFID	M + S	70K	BSW	91777	6.5 - 8	9.8 on 7	31.5	12.5	660	2756@50	820/B/A	
255/65R17/XL	114T	RFID	M + S	70K	BSW	11623	45542	10.2 on 7.5	30.1	12.5	691	2601@50	820/B/A	
255/70R17/XL	116T	RFID	M + S	70K	BSW	59350	6.5 - 8.5	10.2 on 7.5	31.1	12.5	669	2756@50	820/B/A	
255/75R17/XL	116T	RFID	M + S	70K	BSW	36845	6.5 - 8.5	10 on 7	32	12.5	649	2756@50	820/B/A	
265/65R17/XL	116T	RFID	M + S	70K	BSW	51486	7.5 - 9.5	10.7 on 8	30.5	12.5	681	2756@50	820/B/A	
265/70R17/XL	116T		M + S	70K	ORWL	21308	45542	10.7 on 8	31.6	12.5	657	2756@50	820/B/A	
245/75R18/XL	115T	RFID	M + S	70K	BSW	57912	6.5 - 8	9.76 on 7	32.4	12.5	640	2679@50	820/B/A	
255/70R18/XL	116T		M + S	70K	BSW	3101	6.5 - 8.5	10.2 on 7.5	32.1	12.5	648	2756@50	820/B/A	
265/60R18/XL	114H		M + S	70K	BSW	1121	7.5 - 9.5	10.7 on 8	30.5	11	682	2601@50	820/B/A	
265/65R18/XL	116T		M + S	70K	BSW	92862	7.5 - 9.5	10.7 on 8	31.5	12.5	659	2756@50	820/B/A	
265/70R18/XL	116T	RFID	M + S	70K	BSW	69047	45542	10.7 on 8	32.6	12.5	637	2756@50	820/B/A	
275/65R18/XL	116T	RFID	M + S	70K	BSW	9590	7.5 - 9.5	11 on 8	32.1	12.5	648	2756@50	820/B/A	
285/60R18/XL	120H	RFID	M + S	70K	BSW	50305	45573	11.5 on 8.5	31.5	11	661	3086@50	820/B/A	
285/65R18/XL	116T	RFID	M + S	70K	BSW	49085	45573	11.5 on 8.5	32.6	12.5	639	2756@50	820/B/A	
255/65R19/XL	114H		M + S	70K	BSW	16118	45542	10.2 on 7.5	32.1	11	648	2601@50	820/B/A	
265/55R19/XL	113H		M + S	70K	BSW	6909	7.5 - 9.5	10.9 on 8.5	30.5	11	682	2535@50	820/B/A	
245/60R20/XL	111H		M + S	70K	BSW	25904	7 - 8.5	9.8 on 7	31.5	11	659	2403@50	820/B/A	
255/60R20/XL	113H		M + S	70K	BSW	37899	45542	10.2 on 7.5	32	11	649	2535@50	820/B/A	
265/50R20/XL	111H		M + S	70K	BSW	55522	7.5 - 9.5	10.9 on 8.5	30.5	11	683	2403@50	820/B/A	
265/55R20/XL	113H		M + S	70K	BSW	56111	7.5 - 9.5	10.9 on 8.5	31.5	11	660	2535@50	820/B/A	
265/60R20/XL	115H		M + S	70K	BSW	20062	7.5 - 9.5	10.7 on 8	32.5	11	640	2679@50	820/B/A	
275/55R20/XL	117T	RFID	M + S	70K	BSW	4085	7.5 - 9.5	11.2 on 8.5	31.9	12.5	652	2833@50	820/B/A	
275/60R20/XL	116H	RFID	M + S	70K	BSW	13647	7.5 - 9.5	11 on 8	33	11	630	2756@50	820/B/A	
275/65R20/XL	116H		M + S	70K	BSW	47998	7.5 - 9.5	11 on 8	34.1	11	610	2756@50	820/B/A	

Pickup Truck,
Large SUV, and Van

Continued ►

Refer to the Important Product Information section at the back of the book.

Michelin **Defender LTX M/S 2**

Tire Size	Service Description	Technology	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
285/50R20/XL	116H		M + S	70K	BSW	69897	45573	11.7 on 9	31.3	11	665	2756@50	820/B/A	
285/55R20/XL	116T		M + S	70K	BSW	40597	45573	11.7 on 9	32.4	12.5	643	2756@50	820/B/A	
305/50R20/XL	120H		M + S	70K	BSW	73650	8.5 - 11	12.4 on 9.5	32	11	649	3086@50	820/B/A	
275/50R21/XL	113H		M + S	70K	BSW	19536	7.5 - 9.5	11.2 on 8.5	31.8	11	653	2535@50	820/B/A	
275/55R21/XL	116H		M + S	70K	BSW	43596	7.5 - 9.5	11.2 on 8.5	32.9	11	633	2756@50	820/B/A	
265/50R22/XL	112H		M + S	70K	BSW	74839	7.5 - 9.5	10.9 on 8.5	32.5	11	640	2469@50	820/B/A	
275/45R22/XL	112H		M + S	70K	BSW	12872	8.5 - 10.5	10.8 on 9	31.8	11	655	2469@50	820/B/A	
275/50R22/XL	115H		M + S	70K	BSW	38984	7.5 - 9.5	11.2 on 8.5	32.9	11	633	2679@50	820/B/A	
285/45R22/XL	114H		M + S	70K	BSW	44941	9 - 10.5	11.2 on 9.5	32.1	11	648	2601@50	820/B/A	
295/50R22/XL	116H		M + S	70K	BSW	16709	8 - 10.5	12.2 on 9.5	33.6	11	618	2756@50	820/B/A	
305/40R22/XL	114H		M + S	70K	BSW	85293	45636	12.3 on 11	31.6	11	658	2601@50	820/B/A	
305/45R22/XL	118H		M + S	70K	BSW	34799	9.5 - 11.5	11.9 on 10	32.8	11	634	2910@50	820/B/A	
35x12.50R20/F	125S		M + S	50K	BSW	19443	8.5 - 11	12.5 on 10	34.5	14	602	3638@50		
35x12.50R22/F	121S		M + S	50K	BSW	45795	8.5 - 11	12.5 on 10	34.5	14	602	3197@50		
LT245/75R17/E	121/118S	RFID	M + S	50K	BSW	38846	6.5 - 7.5	9.8 on 7	31.5	14	660	3195@80		
LT265/70R17/E	123/120S		M + S	50K	ORWL	45468	7 - 8.5	10.7 on 8	31.6	14	657	3415@80		
LT285/70R17/E	126/123S	RFID	M + S	50K	BSW	44327	7.5 - 9	11.5 on 8.5	32.8	14	635	3750@80		
LT265/70R18/E	124/121S	RFID	M + S	50K	BSW	66531	45542	10.7 on 8	32.6	14	637	3525@80		
LT275/65R18/E	123/120S		M + S	50K	BSW	39974	7.5 - 9	11 on 8	32.1	14	648	3415@80		
LT275/70R18/E	125/122S	RFID	M + S	50K	BSW	13990	7 - 8.5	11 on 8	33.2	14	627	3640@80		
LT285/65R18/E	125/122S	RFID	M + S	50K	BSW	10763	45573	11.5 on 8.5	32.6	14	639	3640@80		
LT295/70R18/E	129/126S	RFID	M + S	50K	BSW	92771	7.5 - 10	11.8 on 8.5	34.3	14	607	4080@80		
LT265/60R22/E	123/120S		M + S	50K	BSW	52050	8 - 9.5	10.7 on 8	34.5	14	602	3415@80		
LT275/50R22/E	119/116S		M + S	50K	BSW	15284	8 - 9.5	11.2 on 8.5	32.9	14	633	3000@80		
LT275/60R22/E	125/122S		M + S	50K	BSW	16553	7.5 - 9.5	10.98 on 8	35	14	594	3640@80		
LT275/50R24/E	121/118S		M + S	50K	BSW	74168	7.5 - 9.5	11.2 on 8.5	34.9	14	596	3195@80		