

Michelin

LTX A/T2

A light truck and SUV all-terrain tire with a compound designed to resist chipping and tearing, providing excellent durability when the pavement ends.



ALL-SEASON



60,000-mile limited warranty.¹


The optimized contact patch shape, provided by MaxTouch Construction, helps deliver extremely long tire life under the toughest conditions.

35% longer life on gravel.²

The tough off-road endurance capability of the LTX A/T2 tire helps it last at least 35% longer on gravel than two leading class competitors.²

A very comfortable ride.

Michelin Comfort Control Technology uses a computer-optimized design and precision manufacturing to reduce vibrations and road noise.

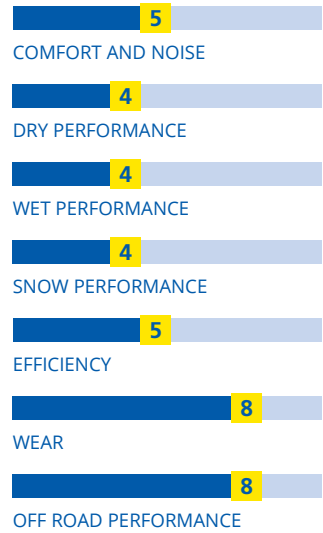

Popular Replacement Market Fitments:

- Toyota Tundra
- Ford F-Series
- Chevrolet Silverado
- GMC Sierra
- Ram Trucks

¹See Michelin Owner's Manual for a complete description.

²Based on Michelin internal gravel endurance test results versus the Bridgestone Dueler A/T Revo 2 and Goodyear Wrangler Silent Armor tires in size LT265/70R17. Actual on- and off-road results may vary.

Michelin **LTX A/T2**

Tire Size	Service Description	Technology	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
265/65R17	112S		M + S	60K	ORWL	97614	7.5 - 9.5	10.7 on 8	30.6	14	681	2244@44	500/A/A	
P275/65R18	114T		M + S	60K	BSW	6841	7.5 - 9.5	11 on 8	32.1	13	648	2365@51	500/A/B	TOY
275/55R20	113T		M + S	60K	BSW	21011	7.5 - 9.5	11.2 on 8.5	31.9	14	652	2304@44	500/A/B	
P275/60R20	114S		M + S	60K	BSW	36429	7.5 - 9.5	11 on 8	33	14	630	2365@44	500/A/B	
LT245/75R16/E	120/116R		M + S	60K	BSW	52691	6.5 - 8	9.8 on 7	30.5	16	683	3042@80		
LT235/80R17/E	120/117R		M + S	60K	BSW	35847	6 - 7.5	9.3 on 6.5	31.8	13.5	654	3085@80		
LT245/75R17/E	121/118R		M + S	60K	BSW	6682	6.5 - 7.5	9.8 on 7	31.5	12.5	660	3195@80		FOR
LT245/75R17/E	121/118R		M + S	60K	ORWL	21691	6.5 - 7.5	9.8 on 7	31.5	12.5	660	3195@80		FOR
LT265/70R17/E	121/118R		M + S	60K	ORWL	69422	7 - 8.5	10.7 on 8	31.7	12.5	657	3195@80		FOR
LT265/70R17/E	121/118R		M + S	60K	ORWL	67198	7 - 8.5	10.7 on 8	31.7	16	657	3195@80		
LT285/70R17/E	121/118R		M + S	60K	ORWL	61143	7.5 - 9	11.5 on 8.5	32.8	17	635	3195@80		
LT265/70R18/E	124/121R TPC		M + S	60K	BSW	9068	45542	10.7 on 8	32.6	12.5	637	3525@80		GM
LT275/65R18/E	123/120R		M + S	60K	ORWL	3822	7.5 - 9	11 on 8	32.1	16	648	3415@80		
LT275/70R18/E	125/122R		M + S	60K	ORWL	71991	7 - 8.5	11.2 on 8	33.2	14.5	628	3640@80		FOR
LT275/70R18/E	125/122S TPC		M + S	60K	BSW	32157	7 - 8.5	11 on 8	33.2	12	627	3640@80		GM
LT275/65R20/E	126/123R		M + S	60K	ORWL	4238	7.5 - 9.5	11 on 8	34.1	14	610	3750@80		FOR
LT285/55R20/E	122/119R		M + S	60K	BSW	16270	45573	11.7 on 9	32.4	16	643	3305@80		

Pickup Truck,
Large SUV, and Van